

BWRO (brackish water reverse osmosis)

High flow – by 8” membrane

Feed source: wells, river, lake and surface water

Feed quality: TDS<10,000ppm, Turbidity <10 NTU, 2.5<SDI<5


Permeate flow rate: 1 ~ 10,000 m³/h

Permeate quality: TDS<50ppm (or less), Turbidity<0.1NTU,

System Recovery: 19~80% (by design)

Membrane type: FILMTEC (USA) BW30-400

Reverse osmosis seawater is a desalination systems for independent and reliable fresh water supply. The reverse osmosis process is ideal for fresh water generation being easy to operate, economical and producing excellent water quality. Our BWRO product line covers a wide range of capacities and accessories to meet the needs of customers as well as the requirements of their applications.



**Water treatment
Brackish Water Reverse Osmosis (BWRO)
Technical Data sheet**


plant	Water treatment			
Process	Brackish water reverse osmosis (BWRO)			
Fluid				
Feed: Brackish water	100<TDS<10,000 ppm	Turbidity : 1~20 NTU	Cl<1,000ppm	pH=7.5
Product: Potable	TDS:10~100 ppm	Turbidity < 0.1 NTU	Cl<200 ppm	pH:6.5~8.5
Unit	Equipment	Application / model	Manufacture	Country
Pretreatment	Feed pump	Pressure up to 5 bar / Centrifugal		Denmark
	Sand filter	Filtration > 50µm / C.S or FRP		Iran
	Activated carbon	Reduce Organic matter / C.S or FRP		Germany
	Chlorination Dosing	Reduce Organic matter/Dosing pump		Germany
	SMBS injection Dosing	Reduce free chlorine/Dosing pump		Germany
	Anti-scaling injection Dosing	Inhibitor / Dosing pump		Germany
	Micro filtration	Filtration > 5µm / PP filter		Iran
	Piping by UPVC	Piping / PN 10		Switzerland
RO	High pressure pump	Pressure: 15~25 bar / Vertical		Denmark
	Pressure vessel	Membrane housing / 300 psi		USA
	Membrane	Water treatment / BW-30-400		USA
	Piping by AISI 316	Piping / SCH 20		Germany
	Concentrate valve	Set flow rate / Globe valve		Germany
Control and instrument	PLC and HMI or SCADA	Automatic control / S7		Germany
	Flow meter	Show flow rate / Rota meter, Glass		Italy
	Pressure switch	System safety / 25 bar		Denmark
	EC meter	Feed and permeate water sense		Switzerland


Application

- ✓ Potable water
- ✓ Demine water
- ✓ Make up water for cooling tower
- ✓ Make up water for Boiler
- ✓ Industrial water
- ✓ Agriculture water



Tehran OFFICE: +98 (0)21-44963166
 CUSTOMER SERVICE: 09124480391
 WEBSITE: www.tarhokar.com
 EMAIL: info@tarhokar.com

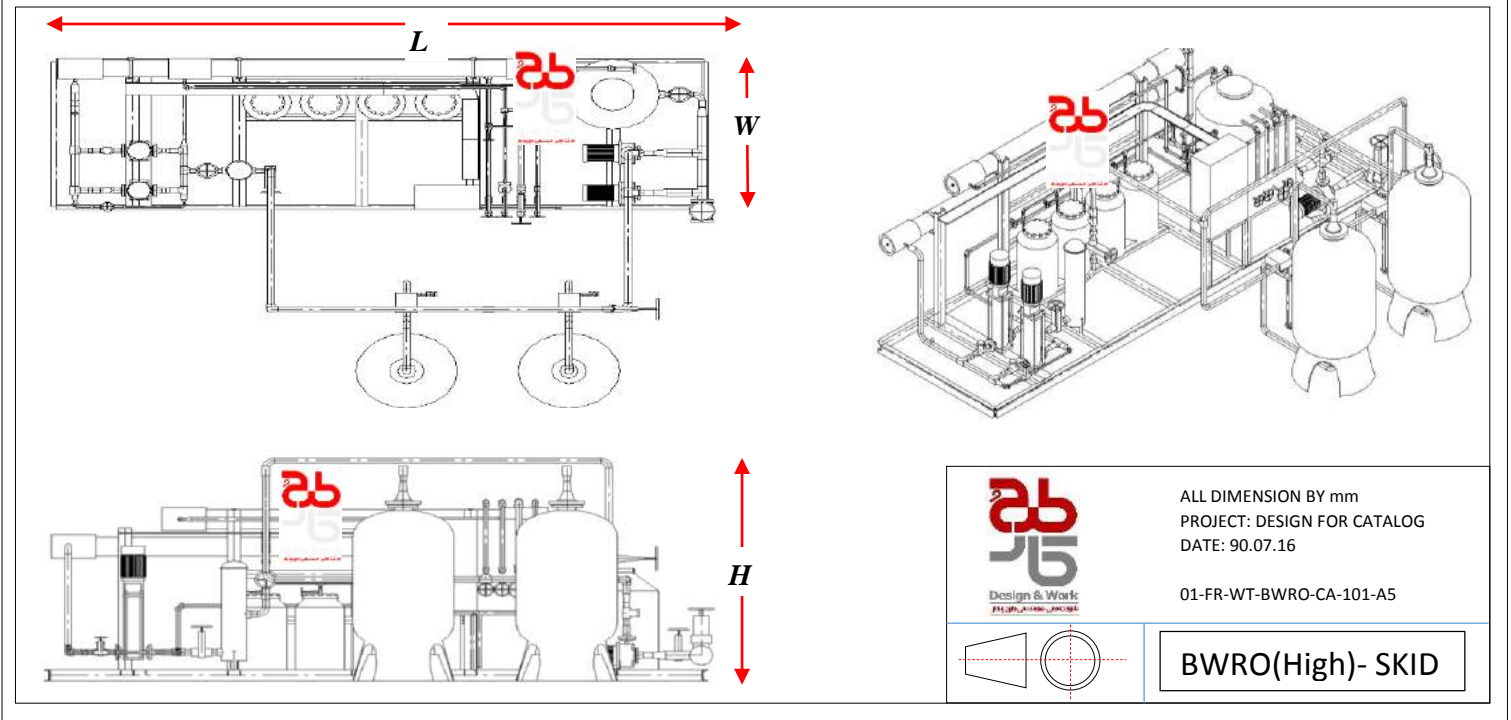


ALL DIMENSION BY mm
 PROJECT: DESIGN FOR CATALOG
 DATE: 90.07.16
 01-FR-WT-BWRO-CA-101-A5
BWRO(High)- SKID

Model	No. of stage	Feed flow	Product flow	Waste flow	Recovery %	Pressure	Dimension by m (approximate)		
							bar	L	W
BWRO-1S-25/19	1	5.5	1	4.5	19%	13	2	1	1.5
BWRO-1S-25/75	1	1.3	1	0.3	75%	19	2	1	1.3
BWRO-1S-50/33	1	6.4	2.1	4.3	33%	13	3	1	1.5
BWRO-1S-50/75	1	2.8	2.1	0.8	75%	18	3	1	1.3
BWRO-2S-100/32	1	8.4	4.2	4.2	50%	15	3	1.2	1.6
BWRO-2S-100/75	1	5.6	4.2	1.4	75%	18	3	1.2	1.5
BWRO-1S-120/50	1	10	5	5	50%	15	4	1.5	1.6
BWRO-2S-130/75	2	7.2	5.4	1.8	75%	18	4	1.5	1.6
BWRO-2S-130/75	2	8.33	6.25	2.08	75%	18	5	1.8	1.7
BWRO-2S-168/65	1	11	7	4	65%	15	6	1.8	1.7
BWRO-2S-240/45	2	22	10	12	45%	14	6	1.8	1.8
BWRO-2S-250/75	2	13.8	10.4	3.4	75%	18	6	1.9	1.8
BWRO-2S-360/75	2	20	15	5	75%	17	6.5	2	2.0
BWRO-2S-528/60	2	37	22	15	60%	19	7	2.5	2.5
BWRO-2S-720/75	2	40	30	10	75%	20	7.5	2.8	2.7
BWRO-2S-840/70	2	50	35	15	70%	15	8	3	2.7

For more than flow call to our technical center : +98 (021) 44963166

Case specific:

System Details

Feed Flow to Stage 1	19.00 m³/h	Pass 1 Permeate Flow	10.50 m³/h	Osmotic Pressure:	Feed	0.41 bar
Raw Water Flow to System	14.00 m³/h	Pass 1 Recovery	75.00 %	Concentrate	1.52 bar	
Feed Pressure	13.18 bar	Feed Temperature	25.0 C	Average	0.97 bar	
Flow Factor	0.75	Feed TDS	859.32 mg/l	Average NDP	11.22 bar	
Chem. Dose	None	Number of Elements	10	Power	8.70 kW	
Total Active Area	371.60 M²	Average Pass 1 Flux	28.26 lmh	Specific Energy	0.83 kWh/m³	
Water Classification	Water SDI < 3					

Pass Streams (mg/l as ion)

Name	Feed	Adjusted Feed		Concentrate		Permeate	
		Initial	After Recycles	Stage 1	Stage 1	Total	Total
NH4+ + NH3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
K	2.31	2.31	3.83	7.99	0.46	0.46	
Na	65.86	65.86	116.30	257.02	2.38	2.38	
Mg	55.20	55.20	98.38	219.15	0.61	0.61	
Ca	100.00	100.00	178.25	397.09	1.07	1.07	
Sr	0.00	0.00	0.00	0.00	0.00	0.00	
Ba	0.00	0.00	0.00	0.00	0.00	0.00	
CO3	0.50	0.50	1.78	4.66	0.00	0.00	
HCO3	217.23	217.23	562.85	1240.85	4.81	4.81	
NO3	29.02	29.02	48.25	100.97	5.27	5.27	
Cl	101.04	101.04	180.17	401.48	0.99	0.99	
F	0.00	0.00	0.00	0.00	0.00	0.00	
SO4	188.16	188.16	335.91	749.33	1.21	1.21	
SiO2	0.00	0.00	0.00	0.00	0.00	0.00	
Boron	0.00	0.00	0.00	0.00	0.00	0.00	
CO2	27.42	27.42	27.66	26.01	24.21		